

Telecom/IT Battery Systems

AGV Battery Systems

Motive Power Systems

Railway Battery Systems

Power Supply

Standby

power.com HC

Sealed lead-acid battery



Product features

⇔ customer benefits

- Electrolyte fixed in glass mat
 - ⇔ no maintenance
 - ⇔ horizontal operation (option)
- Protection against flashback and central degassing integrated in the lid
 - ⇔ Enhanced protection against risk of explosion
- Maximum energy density
 - ⇔ small footprint
- Smooth battery lid with integral handle
 - ⇔ easy-to-clean surface
 - ⇔ easy to handle
- Composite terminal / system connector
 - ⇔ no corrosion
 - ⇔ prevents short-circuits even during installation


Applications

- UPS units
- Power Supply

power.com HC Type Overview

Capacities, Dimensions and Weights

Type	C ₁₀ /1.80 V Ah	C _{1/2} /1.75 V Ah	C _{1/4} /1.70 V Ah	C _{1/6} /1.60 V Ah	Weight kg	Length L mm	Width W mm	Height H mm
power.com HC 121200	35.0	24.8	21.0	19.2	22.0	229	177	230
power.com HC 121600	46.0	33.1	28.0	25.7	22.6	229	177	230
power.com HC 122000	58.0	41.4	35.0	32.0	25.2	229	177	230
power.com HC 122400	70.0	49.5	42.0	38.3	37.0	344	177	230
power.com HC 122800	81.0	58.0	48.8	44.8	37.6	344	177	230
power.com HC 123200	93.0	66.0	55.8	51.2	38.3	344	177	230
power.com HC 123800	110.0	78.5	66.3	60.8	50.5	498	177	230
power.com HC 124200	122.0	87.0	73.3	67.2	54.0	498	177	230
power.com HC 125300	151.0	107.5	90.8	83.2	55.8	498	177	230

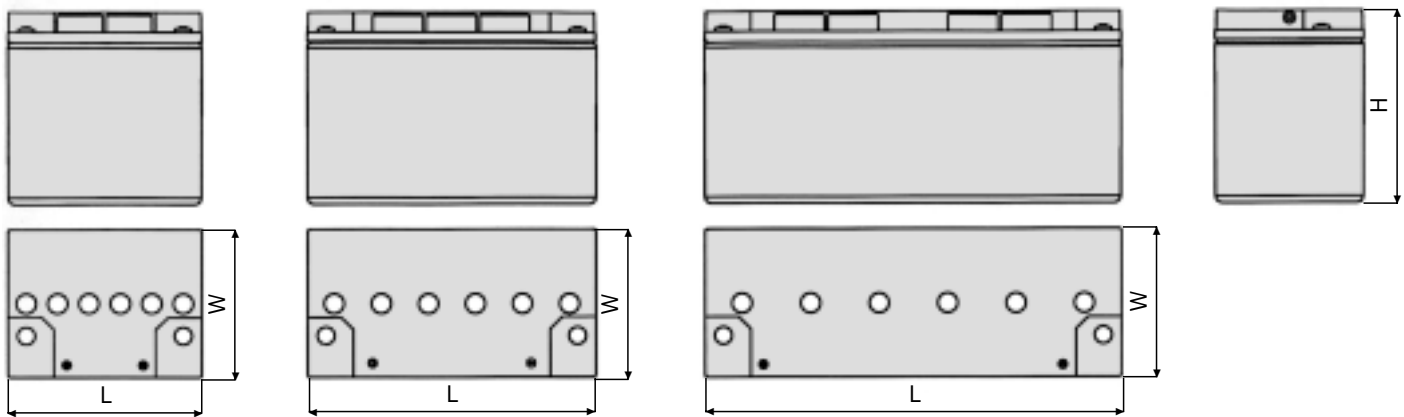

power.com HC 121200 - power.com HC 122400 -
power.com HC 122000 - power.com HC 123200

power.com HC 123800 -
power.com HC 125300

Life expectancy: 10 - 12 years (acc. to EUROBAT)

Sales and Administration
HOPPECKE Batterien GmbH & Co. KG
 P.O.Box 1140 · D-59914 Brilon
 Bontkirchener Straße 1 · D-59929 Brilon-Hoppecke
 Phone + 49 29 63 61-3 74 · Fax + 49 29 63 61-2 70
 www.hoppecke.de · info@hoppecke.com

 **HOPPECKE**
POWER FROM INNOVATION